

AGM 670 901 110, 170 Ah (GL23BK3_1)

According to EN 50342



AGM series

HEAVY-DUTY VEHICLES



Electrical specification

Voltage:	12V
Capacity C20:	170 Ah
Cold cranking current:	1100 A [EN]
Cold cranking current:	660 A [DIN]

Mechanical specification

Dimensional group:	B
ETN reference:	670 901 110
DIN reference:	67001
Dimensions^A in mm (LxWxH):	513x223x223
Cell Layout:	3
Terminal Type:	1

Container

Case	Material	Polypropylene
	Bottom hold-down	B0
	Colour	Black

Lid	Material	Polypropylene
	Cover design	Flat VRLA
	Colour	Black

Vent caps	Material	Polypropylene
	Type	VRLA
	Colour	Black

Handles	Material	Polypropylene
	Position	Sides - on container
	Colour	Black


Battery classification as per EN 50342-6

Water consumption	Charge retention	Vibration resistance	Endurance Level
W5	C2	V3/V4	E3/M3

Weight^B

Battery weight in kg:	37,3
Acid weight in kg:	9,7
Total battery weight in kg:	47,0

Layout

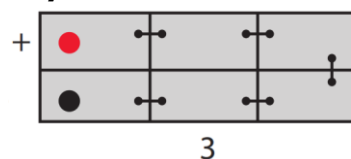

Hold-down



Separator

Type	AGM
-------------	------------

A. Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
B. Weight may vary ±5%.